



Research Paper

COMPARISON OF SEISMIC BEHAVIOR OF A STRUCTURE WITH COMPOSITE COLUMNS AND CONVENTIONAL COLUMNS IN VARIOUS SEISMIC ZONES AND SOIL CONDITIONS

LAKUDARAM MAHESH¹, A. LAKSHMI²

1M. Tech Student, Department of Civil Engineering, JNTUH University College of Engineering Sultanpur, Sultanpur, Choutkur, Telangana 502273

2Assistant professor, Department of Civil Engineering, JNTUH University College of Engineering Sultanpur, Sultanpur, Choutkur, Telangana 502273

Abstract The majority of building structures are designed and constructed in reinforced concrete which is mainly depends upon availability of the constituent materials and the level of skill required in construction, as well as the practicality of design codes. R.C.C is no longer economical because of their increased dead load, hazardous formwork. However composite construction is a new concept for construction industry. The use of modern composite systems, allowing the erection of multi-story structural frames to proceed at pace, can make it economically prohibitive to delay the construction of each floor while concrete columns are cast. In Japan, however, the superior earthquake resistant properties of composite beam-columns have been long recognized and have become a commonly used for construction in that region. It was therefore necessary to develop seismic design criteria for typically used Indian structural systems, to advance the use of this efficient type of mixed construction. This Project shows comparison of various aspects of building.

In this project a residential of G+15 multi-story building is studied for Response Spectrum Analysis using ETABS with the help of RCC column and Composite columns. Totally 24 models are carried out in various seismic zones and soil conditions. The results like storey drift, storey shear, storey bending, storey torsion, time period, frequency and storey stiffness values are compared for this 24 models.

KEY WORDS: Response spectrum analysis, ETABS, RCC column, Composite column, storey drift, storey shear

Received: 11-08-2025

Accepted: 13-09-2025

Published: 20-09-2025

1. INTRODUCTION

Structural engineers do not traditionally consider fire as a load on the structural frame. This is in contrast to other loads they must consider. Seismic design relies on modeling, risk analysis and changes to the structural stiffness. Wind design relies on additional structural members and wind tunnel tests. Fire design relies on very simple, single element tests and

adding insulating material to the frame. Thermal induced forces are generally not calculated or designed.

Natural disasters are inevitable and it is not possible to get full control over them. The history of human civilization reveals that man has been combating with natural disasters from its origin but natural disasters like floods, cyclones, earthquakes, volcanic eruptions have

various times not only disturbed the normal life pattern but also caused huge losses to life and property and interrupted the process of development. With the technological advancement, man tried to combat with these natural disasters through various ways like developing early warning systems for disasters, adopting new prevention measures, proper relief and rescue measures. But unfortunately it is not true for all natural disasters. Earthquakes are one in all such disasters that's connected with in progress tectonic process; it suddenly comes for seconds and causes nice loss of life and property. So earthquake disaster prevention and reduction strategy is a global concern today. Hazard maps indicating seismic zones in seismic code are revised from time to time which leads to additional base shear demand on existing buildings.


Building construction is that the engineering offers with the development of constructing akin to residential buildings in a really effortless constructing will probably be outline as an enclose area via partitions with roof, food, fabric and accordingly the basic desires of contributors. Inside the early earlier interval people lived in caves, over bushes or beneath bushes, to safeguard themselves from wild animals, rain, sun, etc. Because the occasions handed as people being started dwelling in huts created from trees branches. The shelters of these previous are developed at the moment into wonderful residences. Rich individuals reside in sophisticated houses.

Composite columns are often used in structures due to the ease and speed of erection, and high performance in fire situation. Concrete filled tubes are steel tubes that are in site filled with reinforced concrete. In normal situation column works as composite while in fire situation majority of the load is carried by the reinforced concrete core. There are numerous publications about this type of columns but all of them use very simplified methods. Especially

regarding the calculation of the neutral axis of circular columns. Also the shear resistance of the column is often omitted.

Composite columns

Composite columns may take a range of forms, as shown in the figure below. As with all composite elements they are attractive because they play to the relative strengths of both steel and concrete. This can result in a high resistance for a relatively small cross sectional area, thereby maximising useable floor space. They also exhibit particularly good performance in fire conditions.

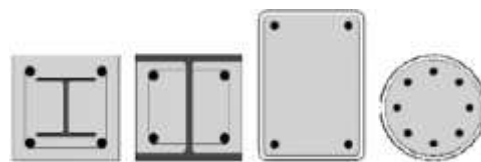

Typical composite column cross sections

Advantages of Composite Columns

In many cases of design, concrete or some other protective material is required around steel columns for reasons of fire-resistance and durability. It would seem appropriate, therefore, to develop composite action between the steel and concrete, thereby taking advantage of the inherent compressive strength of the concrete, increasing the compressive resistance of the section and leading to considerable savings in the cost of the steelwork. Even ignoring this composite action, the slenderness of the steel column in lateral buckling is reduced, thereby increasing the compressive stress that can be resisted by the steel section.

Much research has gone into the behavior of concrete filled tubular sections. Architecturally, tubular columns have many attractive features; concrete filling has no visual effect on their appeal. The advantages from a structural point of view are, first, the tri axial confinement of the concrete within the section, and second, the fire resistance of the column, which largely depends on the residual capacity of the concrete core.

Steel building

Steel building is a metal structure fabricated with steel for the internal support and for exterior cladding, as opposed to steel framed buildings which generally use other materials for floors, walls, and external envelope. Steel buildings are used for a variety of purposes including storage, work spaces and living accommodation. They are classified into specific types depending on how they are used.

Steel buildings first gained popularity in the early 20th century. Their use became more widespread during World War II and significantly expanded after the war when steel became more available. Steel buildings have been widely accepted, in part due to cost efficiency. The range of application has expanded with improved materials, products and design capabilities with the availability of computer aided design software.


Advantages of steel building

Steel provides several advantages over other building materials, such as wood. Steel is structurally sound and manufactured to strict specifications and tolerances. Any excess material is 100% recyclable. Steel does not easily warp, buckle, twist or bend, and is therefore easy to modify and offers design flexibility. Steel is also easy to install. Steel is cost effective and rarely fluctuates in price. Steel allows for improved quality of construction and less maintenance, while offering improved safety and resistance. With the propagation of mold and mildew in residential buildings, using steel minimizes these infestations. Mold needs moist, porous material to grow. Steel studs do not have those problems.

Seismic zones of INDIA

Each country does planning of its domain dependent on all catastrophic events like earthquake, twister, flood and well of lava and so on.. This planning is done based on previous history and components liable for such

catastrophe of present around there. This planning causes individuals to design their home and other infrastructure so they don't turn into the casualty of such calamity and can withstand catastrophes with as least as conceivable death toll and property. Code of training of all countries for design of structures and other structure suggested design rules dependent on such planning or zoning.

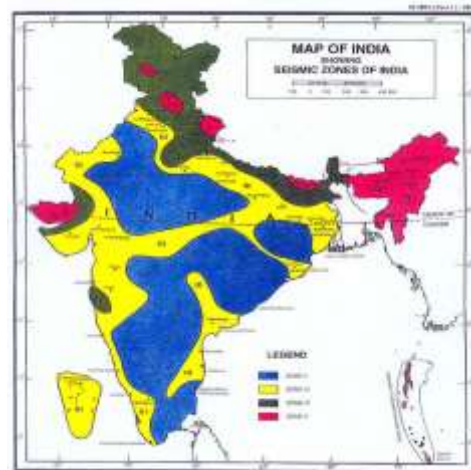

Seismic zone map in India

Subsequently one who is designing a home must think about the impact of such debacle and make reasonable arrangement in its auxiliary design. One must counsel his/her engineer/auxiliary designer to incorporate such arrangement dependent on the zoning.

In India, the nation has been isolated into 4 zones. Prior there were 5 zones anyway after Bhuj Earthquake of 2001, the zone I have been dispensed with. Every nation on the planet has such zoning for all such cataclysmic events. India is partitioned into 4 seismic zones for example Zones II, III, IV and V. These zones are separated based on Maximum Considered Earthquake and administration life of structure in each seismic zone.

Seismic zone have been categorized as follows:

ZONE V

The areas of this zone have the highest risk of effects by an earthquake. The earthquake intensity for this zone is MSK-IX or greater. The

zone factor for this zone is 0.36, which is indicative of effective (zero period) level earthquake in this zone. This zone is called as Very High Damage Risk Zone. Some of the regions which fall under this zone are Rann of Kutch, Eastern regions etc.

Zone VI

The areas of this zone have the lesser risk to effects by an earthquake as compared to zone V. The earthquake intensity for this zone is between MSK VIII to MSK-IX. The zone factor for this zone is 0.24. This zone is called as High Damage Risk Zone. Some of the regions which fall under this zone are Northern regions, North Eastern regions, Delhi etc.

Zone III

The areas of this zone have the lesser risk by an earthquake. The earthquake intensity for this zone is MSK VII. The zone factor for this zone is 0.16. This zone is called as Moderate Damage Risk Zone. Some of the regions which fall under this zone are some parts of Gujarat & Maharashtra, Andaman Nicobar Islands etc.

Zone II

The areas of this zone have the least risk of an earthquake. The earthquake intensity for this zone is MSK VI. The zone factor for this zone is 0.10. This zone is called as Low Damage Risk Zone. Larger parts of India come under this zone.

One can see that in zone II, the intensity is VI on M scale while in zone V it is IX or greater, i.e. the damage and effect would be higher.

Soil conditions in INDIA

The type of soil mainly constituting the foundation are categorized into three types

a) Type I - Rock or Hard Soil

Very much reviewed rock and sand rock and sand rock blends with or without mud folio, and clayey sands ineffectively evaluated or sand earth blends (GB, CW, SB, SW, and SC) having N over 30, where N is the standard infiltration esteem.

b) Type II - Medium Soil

All soils with N between 10 and 30, and poorly graded sands or gravelly sands with little or no fines (SP) with $N > 15$

c) Type III - Soft Soil

All dirt other than SP with $N < 10$. The above order depends on IS1498-1970 [IS 1498, 1970], which utilizes prefixes and additions to arrange the sort and subgroup as abridged in Table 2 and Table 3. These prefixes and postfixes are utilized as a gathering image as indicated by the order of the dirt.

Objectives of the study

The following are the objectives of the study considered

1. To study the G+15 storied structure as per code (IS1893:2002) provision by using different columns like RCC, steel and composite columns.
2. To analyze the buildings in ETABS software with the help of seismic analysis.
3. The results like storey drift, storey shear force, story bending, building torsion of structures using pushover analysis is carried out.
4. Ductility-based earthquake-resistant design as per IS 13920

II LITERATURE STUDIES

Sonia Longjam, S. Aravindan The paper presents the plan, model, analyze and design of a vertical irregular shopping mall structure of G+10storey and investigate its performance under various lateral loading conditions. The main goal is to assess current Indian Standard design practice and to provide design guidelines using ETABS and to find a detailing strategy which will ensure a sufficient level of safety for various levels of loading demands.

Abhay Guleria Presented the analysis of multi story RCC building for different plan

configuration. The analysis has performed for the earthquake loads. The specification of lateral loads has been taken from IS 1893 (Part 1)-2002. The modeling and analysis has done by using finite element based software ETABS. From the analysis and results, they conclude that the effect of shape is very important. And also they compare the result of different plan configuration buildings such as story shear, overturning moment, story drift, story displacement and mode shapes. In addition, this study suggests that L-shape and I-shape structure gives almost similar response against overturning moment, story drift, and Story displacement.

Syed Khasim Mutwalli, Dr. Shaik Kamal Mohammed Azam This study presents the procedure for seismic performance estimation of high-rise buildings based on a concept of the capacity spectrum method. In 3D analytical model of thirty storied buildings have been generated for symmetric buildings Models and analyzed using structural analysis tool ETABS. The analytical model of the building includes all important components that influence the mass, strength, stiffness and deformability of the structure. To study the effect of concrete core wall & shear wall at different positions during earthquake, seismic analysis using both linear static, linear dynamic and non- linear static procedure has been performed.

III METHODOLOGY USED

Response Spectrum Analysis

This method is also known as modal method or mode superposition method. It is based on the idea that the response of a building is the superposition of the

responses of individual modes of vibration, each mode responding with its own particular deformed shape, its own frequency, and with its own modal damping.

According to IS-1893(Part-1):2002, high rise and irregular buildings must be analysed by response spectrum method using design spectra shown in Figure 4.1. There are significant computational advantages using response spectra method of seismic analysis for prediction of displacements and member forces in structural systems. The method involves only the calculation of the maximum values of the displacements and member forces in each mode using smooth spectra that are the average of several earthquake motions. Sufficient modes to capture such that at least 90% of the participating mass of the building (in each of two orthogonal principle horizontal directions) have to be considered for the analysis. The analysis is performed to determine the base shear for each mode using given building characteristics and ground motion spectra. And then the storey forces, accelerations, and displacements are calculated for each mode, and are combined statistically using the SRSS combination.

However, in this method, the design base shear (V_B) shall be compared with a base shear (V_b) calculated using a fundamental period T . If V_B is less than V_b response quantities are (for example member forces, displacements, storey forces, storey shears and base reactions) multiplied by V_B/V_b . Response spectrum method of analysis shall be performed using design spectrum. In case design spectrum is specifically prepared for a structure at a particular project site, the same may be used for design at the

discretion of the project authorities. Figure 4.1 shows the proposed 5% spectra for rocky and soils sites.

For structures with VE dampers, the seismic response envelopes of the structure can be also carried by response spectrum analysis using the response spectra of the input ground motions with damping ratios calculated from Equation (3). Figures 8a and 8b show typical results of the floor lateral displacement and story shear envelopes of a 5. story steel frame with added VE dampers ($\zeta = 15\%$) under 0.62 El Centro earthquake using the CQC method (Kiureghian 1981). The structure remained elastic during the earthquake. Also included in these figures are the envelopes of experimental and analytical time history analysis results. It can be seen that the response spectrum analysis gives reliable predictions on the lateral displacement and story shear envelopes of the visco elastically damped structure.

IV SPECIFICATIONS AND MODELS USED

Problem statement


In the present study, analysis of G+ 15 stories building in Zone V is carried out in ETABS.

Basic parameters considered for the analysis are


1. Grade of concrete : M30
2. Grade of Reinforcing steel: HYSD Fe500
3. Dimensions of beam : 460mmX690mm
4. Dimensions of column : 690mmX690mm
5. Thickness of slab : 180mm
6. Composite column : 0.69X0.69 with angle section
7. Height of bottom story : 3m
8. Height of Remaining story : 3m
9. Live load : 3 KN/m^2
10. Dead load : 2 KN/m^2
11. Density of concrete : 25 KN/m^3

12. Seismic Zone : All Zones
13. Site type : All Soil Conditions
14. Importance factor : 1.5
15. Response reduction factor : 5
16. Damping Ratio : 5%
17. Structure class : B
18. Basic wind speed : 44m/s
19. Risk coefficient (K_1) : 1.08
20. Terrain size coefficient (K_2): 1.14
21. Topography factor (K_3) : 1.36
22. Wind design code : IS 875: 1987 (Part 3)
23. RCC design code : IS 456:2000
24. Steel design code : IS 800: 2007
25. Earth quake design code : IS 1893 : 2002 (Part 1)

Models used for the study

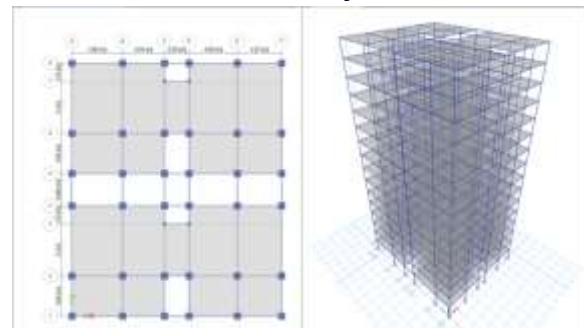

Building with RCC Column

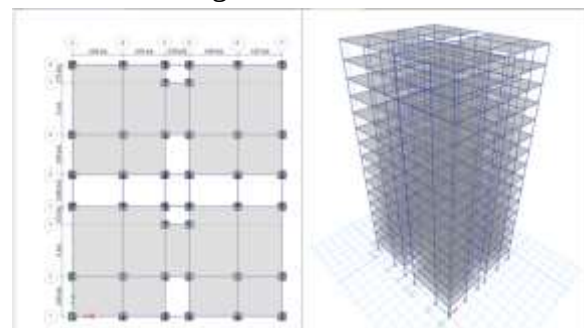


Composite column Building


V RESULTS AND ANALYSIS

Zone V Results


Comparison of Displacement Values

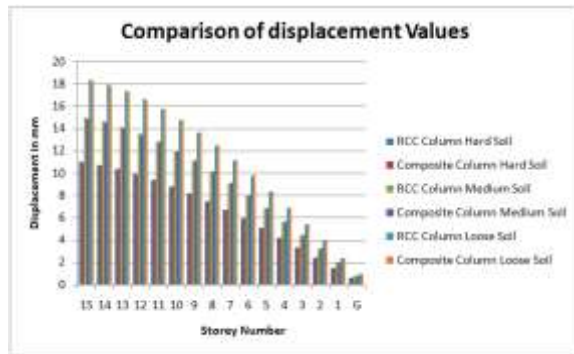


Comparison of Base shear

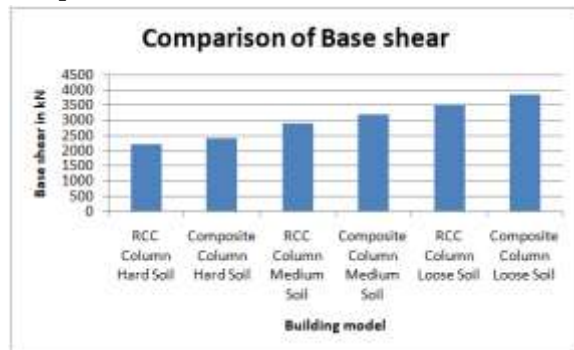


Comparison of Time period

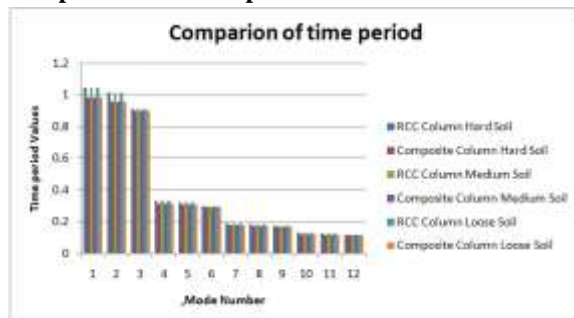


Comparison of frequency

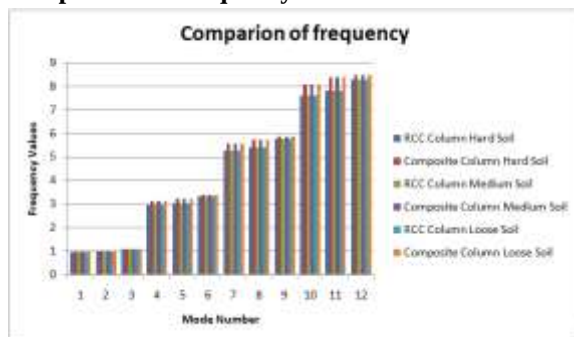


Comparison of acceleration

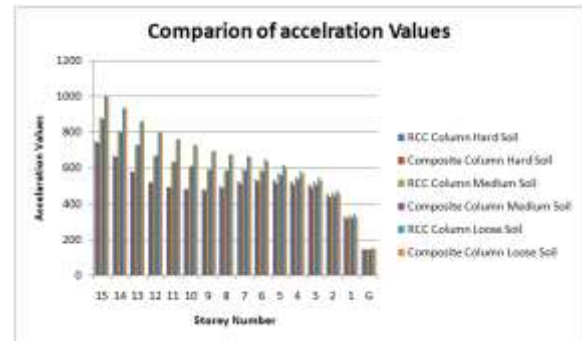


Comparison of Shear Force

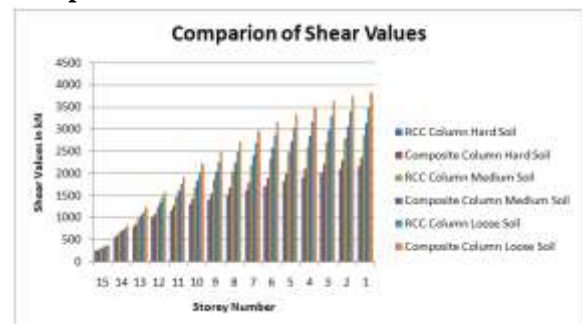

Comparison of torsion


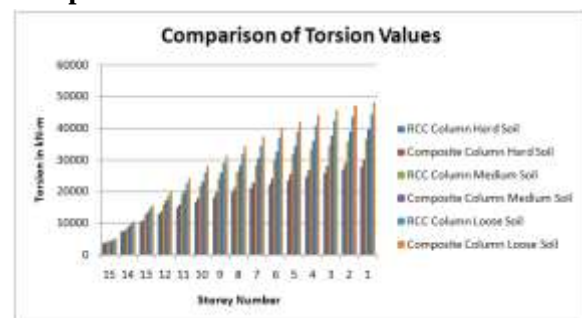


Comparison of Bending moment

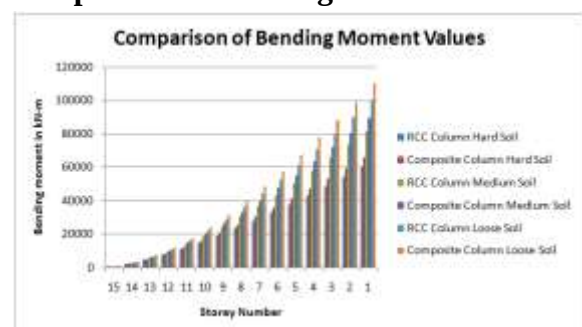


Zone IV Results


Comparison of Displacement Values

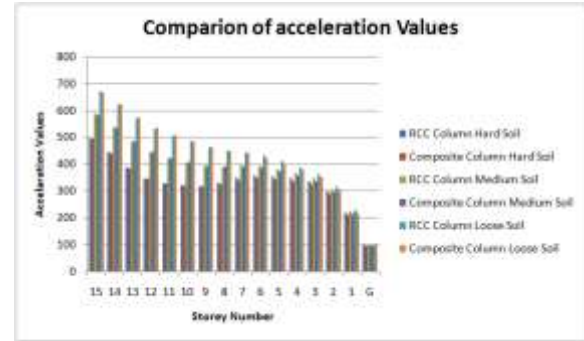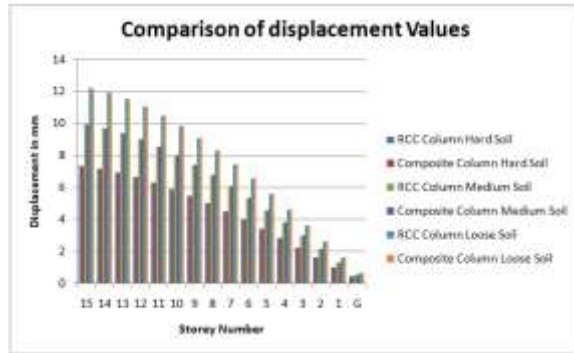


Comparison of Base shear

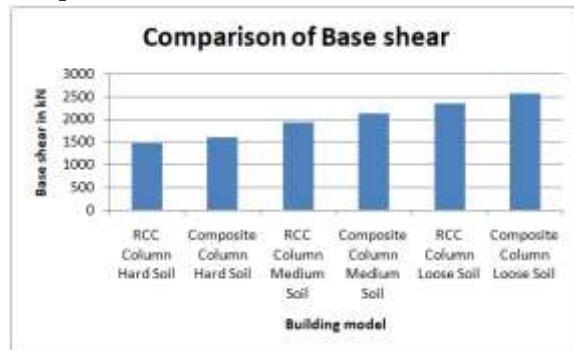


Comparison of Shear Force

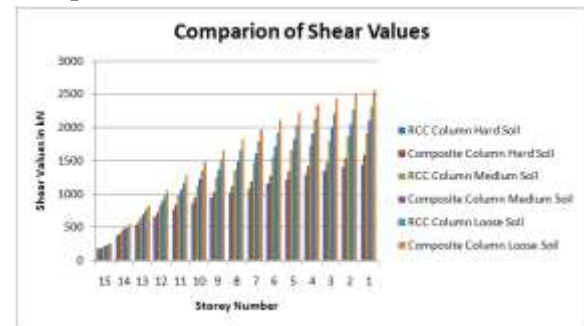


Comparison of Time period

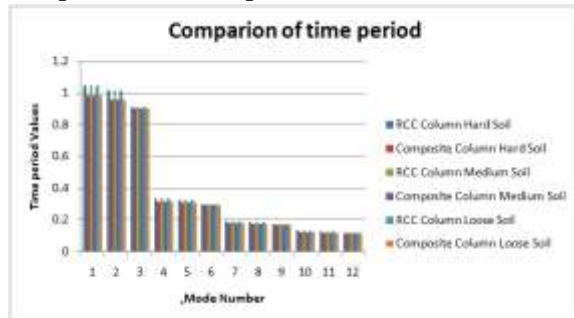


Comparison of torsion

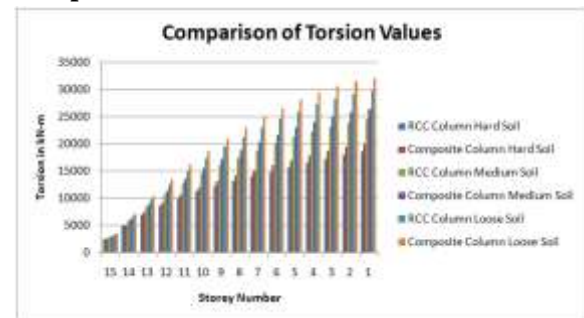

Comparison of frequency

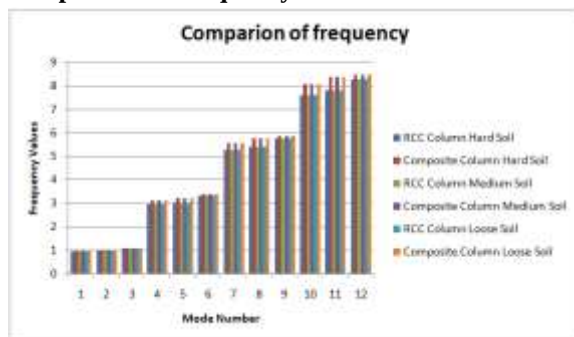


Comparison of Bending moment

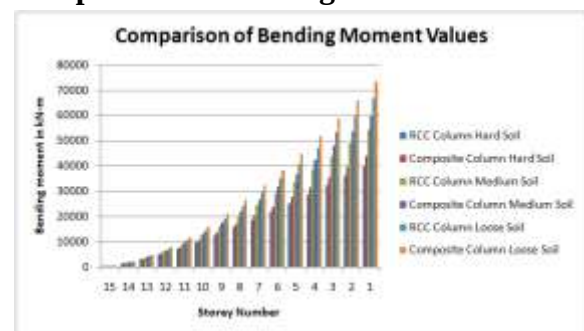


Zone III Results

Comparison of Displacement Values


Comparison of acceleration

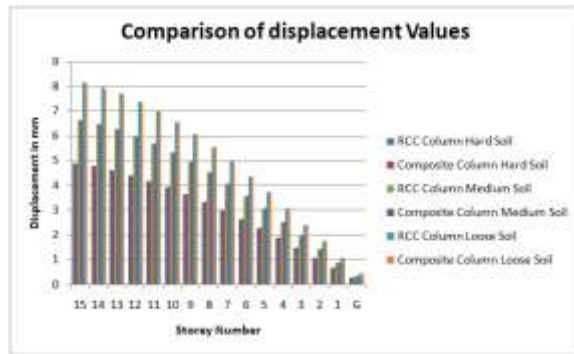


Comparison of Base shear

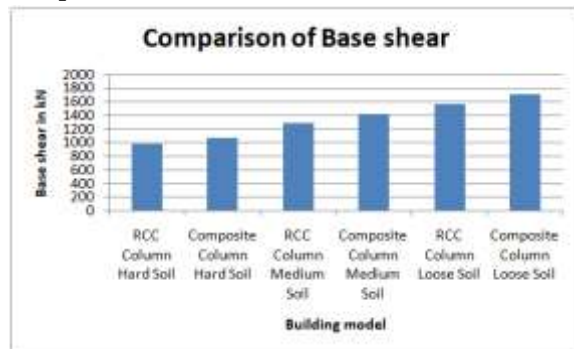


Comparison of Time period

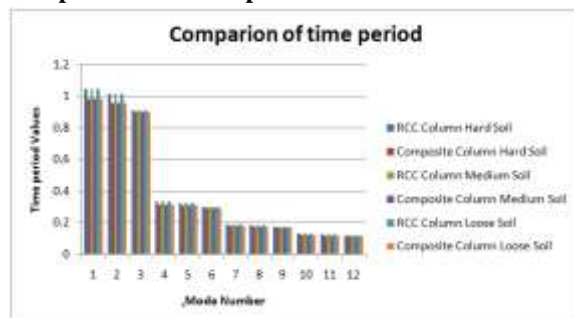

Comparison of frequency

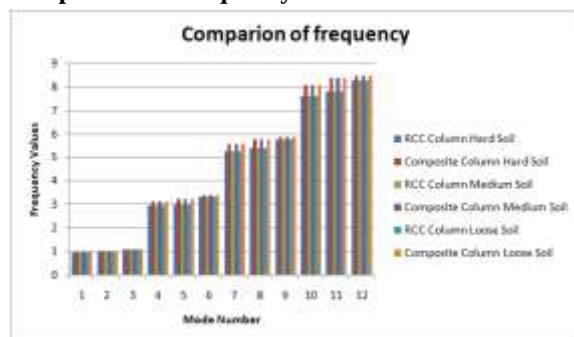


Comparison of acceleration

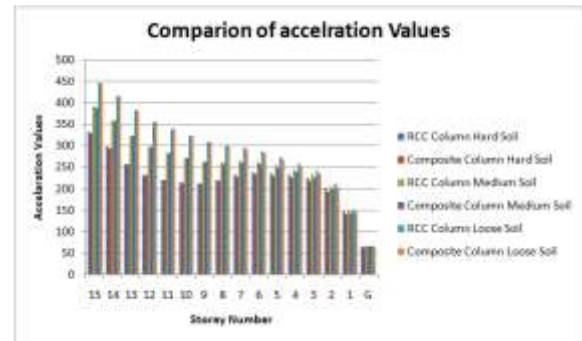


Comparison of Shear Force



Comparison of torsion


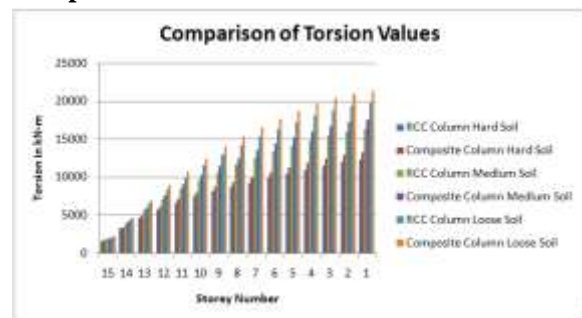


Comparison of bending moment


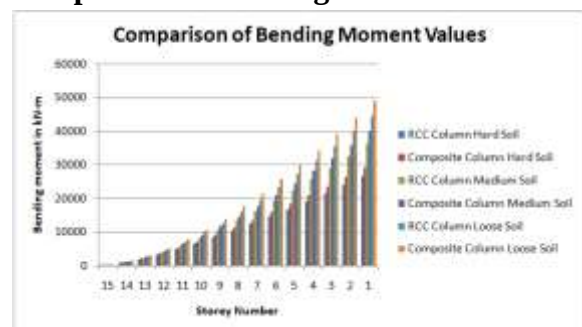


Zone II Results



Comparison of Displacement Values

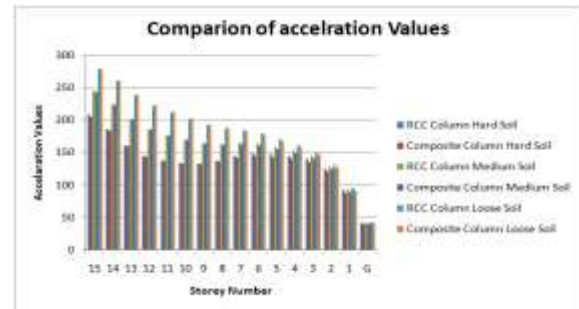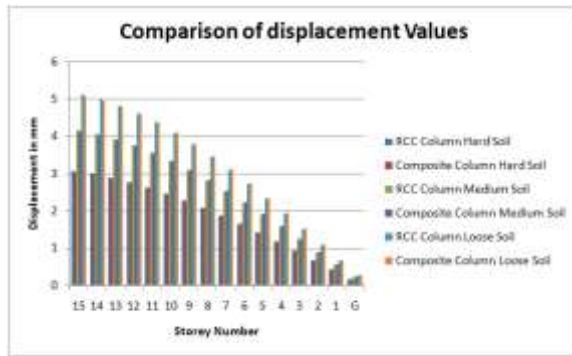



Comparison of Shear Force

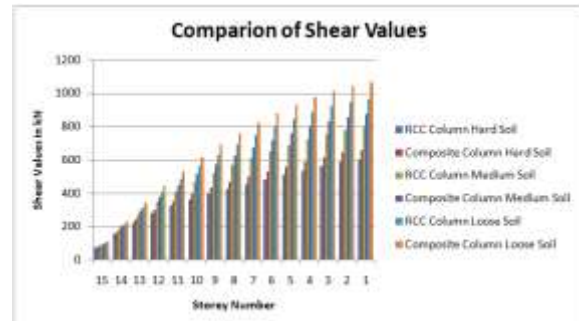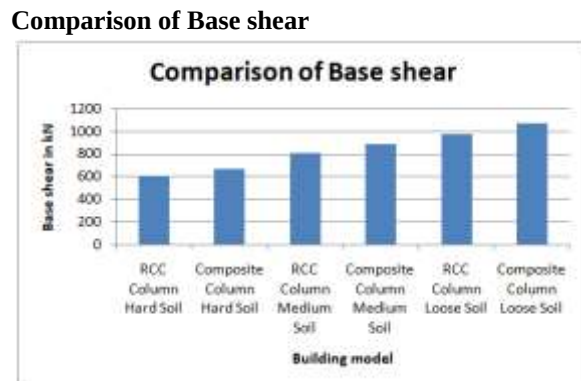

Comparison of torsion

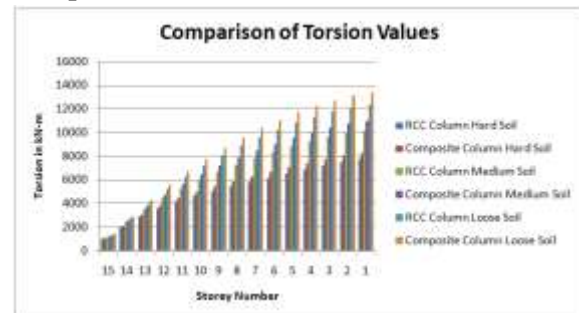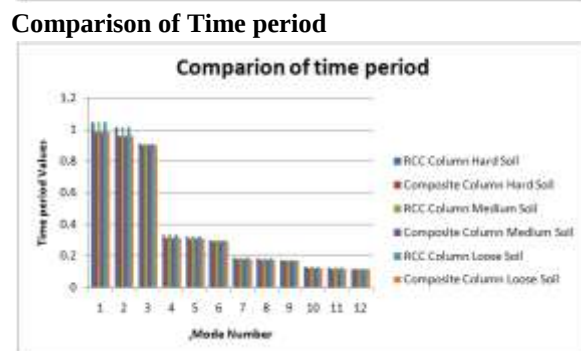

Comparison of bending moment

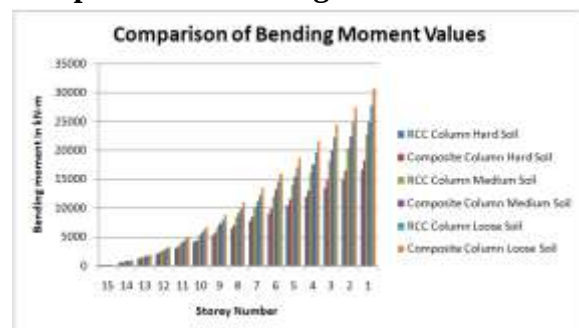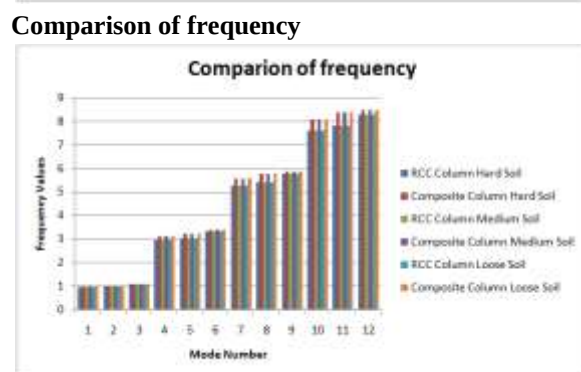

VI CONCLUSIONS

From the above analytical study the following conclusions were made

1. Composite columns are often used in structures due to the ease and speed of erection, and high performance in fire situation.

Comparison of acceleration

2. Concrete filled tubes are steel tubes that are in site filled with reinforced concrete. In normal situation column works as composite while in fire situation majority of the load is carried by the reinforced concrete core.
3. The major advantage of composite column building that it will reduce the deflection values as compared to other buildings.
4. The values of story displacement in all the seismic zones has less values for the building model made with composite columns building model when we compared with RCC column and also has less values for the hard soil condition.
5. The value of shear, bending and torsion also has less value for composite column buildings than RCC building in all seismic zones.
6. The time period values will be decreases from mode 1 to mode 12 in all the cases of building models made in various seismic zones.
7. The model stiffness values will be increases from mode 1 to mode 12 in all the cases of building models made in various seismic zones.
8. From the above points the Composite column building has less values of SF, BM, Twist, Story Displacement and other factors than the RCC building.
9. Composite column building having less displacement values when we compared with RCC building model so the composite column section is having more resistant than RCC.

REFERENCES

- 1) IS 1893 (Part 1): (2002), "Criteria for Earthquake Resistant Design of Structures Part 1 General Provisions and Buildings", Bureau of Indian Standards.
- 2) CSI Computers and Structures INC. "Introductory Tutorial for E-TABS: Linear and Nonlinear Static and Dynamic Analysis and Design of Three-Dimensional Structures" 2011
- 3) CSI (2009). "E-TABS: Static and Dynamic Finite Element Analysis of Structures" Nonlinear Version 14, Computers and Structures.
- 4) B.C. Punmia, A.K. Jain, 2006, "R.C.C Designs", Laxmi publications New Delhi.
- 5) IS-456 2000 plain and reinforced concrete code of practice.
- 6) P. Agarwal, M. Shrikhande, Earthquake resistance design of structures, PHI learning Pvt. 2012.
- 7) Theory of Structures by Ramamrutham for literature review on kani's method
- 8) Reinforced and slab.concrete Structures by A.K. Jain and B.C. Punmia for design of beams, columns
- 9) ETABS Version 9.70 (1997), Computers and Structures, Inc., Berkeley, California. International Code Council, Inc. (2000). International Building Code.
- 10) B. K. Sanghani and P. G. Patel, "Behaviour of Building Component in Various Zones," International Journal of Advances in Engineering Sciences, Vol. 1, Issue 1(Jan. 2011).
- 11) Simu, E and Miyata, T. (2006), "Design of buildings and bridges for wind a practical guide for ASCE-7 standard users and designers of special structures, John Wiley & Sons.
- 12) Sinha, S.N., Handbook of reinforced concrete design, 1996, Tata McGraw-Hill Publishing Company limited, New Delhi 110 008.