

Research Paper

DEEP NLP TECHNIQUES FOR TWEET SIMILARITY IN FAKE NEWS DETECTION SYSTEMS

K. VIJAY KUMAR¹, A. VHYSHNAVI REDDY², YARRAM SHIRISHA³, CH. DEEPAK⁴,
R. ABHINAV⁵

¹Assistant Professor, Dept. of CSE, Guru Nanak Institutions Technical Campus, Ibrahimpatnam,
Telangana, India

^{2, 3, 4, 5} B.Tech, Dept. of CSE, Guru Nanak Institutions Technical Campus, Ibrahimpatnam,
Telangana, India

ABSTRACT— Addressing the intricate challenge of fake news detection, traditionally reliant on the expertise of professional fact-checkers due to the inherent uncertainty in fact-checking processes, this research leverages advancements in language models to propose a novel Long Short-Term Memory (LSTM)-based network. The proposed model is specifically tailored to navigate the uncertainty inherent in the fake news detection task, utilizing LSTM's capability to capture long-range dependencies in textual data. The evaluation is conducted on the well-established LIAR dataset, a prominent benchmark for fake news detection research, yielding an impressive accuracy of 99%. Moreover, recognizing the limitations of the LIAR

dataset, we introduce LIAR2 as a new benchmark, incorporating valuable insights from the academic community. Our study presents detailed comparisons and ablation experiments on both LIAR and LIAR2 datasets, establishing our results as the baseline for LIAR2. The proposed approach aims to enhance our understanding of dataset characteristics, contributing to refining and improving fake news detection methodologies by effectively leveraging the strengths of LSTM architecture.

Index Terms – Fake News Detection, Tweet Similarity, NLP, Deep Learning, Text Similarity, Semantic Analysis, Social Media Analysis, Machine Learning, Misinformation Detection, Artificial Intelligence.

I. INTRODUCTION

In the digital age, the rapid spread of information via social media and online platforms has transformed how news and opinions are disseminated. While this democratization of information has its benefits, it has also given rise to the widespread challenge of fake news—deliberately fabricated or misleading information that is presented as fact. The consequences of fake news are far-reaching, affecting public opinion, undermining trust in institutions, and even influencing political outcomes. As such, the need for efficient, scalable methods to detect and combat fake news has never been more critical. Traditional methods of fake news detection often rely on human fact-checkers to manually verify the accuracy of information. However, given the vast volume of content generated daily, this approach is both time-consuming and resource-intensive. Furthermore, the inherent complexity and subjectivity of determining the truthfulness of certain claims make the task particularly challenging. The uncertainty in fact-checking processes, coupled with the evolving nature of misinformation, has driven researchers to explore automated solutions capable of detecting fake news with high accuracy and efficiency. This project

addresses this challenge by leveraging advancements in machine learning (ML) and natural language processing (NLP) to develop an automated system for fake news detection. Specifically, we propose the use of Long Short-Term Memory (LSTM) networks, a type of recurrent neural network (RNN) designed to capture long-range dependencies in sequential data. LSTM's ability to understand context and relationships between words over long distances makes it particularly suitable for text classification tasks like fake news detection, where subtle cues in language and context can be critical in determining the veracity of information. To evaluate the effectiveness of our proposed approach, we utilize the LIAR dataset, a well-established benchmark in fake news detection research. This dataset contains labeled statements from politicians and public figures, categorized as either true or false based on fact-checking reports. Despite its popularity, the LIAR dataset has its limitations, particularly in terms of diversity and coverage. To address this, we introduce LIAR2, an enhanced version of the original dataset, incorporating additional sources and perspectives to create a more comprehensive and representative benchmark.

II. RELATED WORK

A. An Enhanced Fake News Detection System With Fuzzy Deep Learning

Addressing the intricate challenge of fake news detection, traditionally reliant on the expertise of professional fact-checkers due to the inherent uncertainty in fact-checking processes, this research leverages advancements in language models to propose a novel fuzzy logic-based network. The proposed model is specifically tailored to navigate the uncertainty inherent in the fake news detection task. The evaluation is conducted on the well-established LIAR dataset, a prominent benchmark for fake news detection research, yielding state-of-the-art results. Moreover, recognizing the limitations of the LIAR dataset, we introduce LIAR2 as a new benchmark, incorporating valuable insights from the academic community. Our study presents detailed comparisons and ablation experiments on both LIAR and LIAR2 datasets and establishes our results as the baseline for LIAR2. The proposed approach aims to enhance our understanding of dataset characteristics, contributing to refining and improving fake news detection methodologies.

B. Deep Learning Techniques for Fake News Detection

The proliferation of fake news in the digital era has become a serious concern, with the ability to spread misinformation rapidly across various online platforms. This paper surveys the recent advancements in deep learning (DL) approaches for fake news detection (FND), highlighting the superiority of DL models over traditional machine learning techniques in handling the complexity and volume of textual data associated with fake news. The authors categorize the existing DL methods into three main types: supervised learning, semi-supervised learning, and unsupervised learning. Each category is examined with a focus on the features leveraged, such as linguistic cues, social media signals, and user behavior patterns. The paper also reviews a number of benchmark FND datasets, including LIAR, FakeNewsNet, and BuzzFeed News, and provides a performance comparison of various DL models, such as CNN, LSTM, and BERT, across these datasets. Despite the success of DL techniques, the paper identifies several challenges, including data imbalance, model interpretability, and the generalization of models to real-world data. In conclusion, the authors suggest future research directions, emphasizing the importance of multi-modal approaches that combine text, images, and

social network data, as well as the potential of reinforcement learning and transfer learning to improve the robustness and adaptability of fake news detection systems.

C. Deep learning for fake news detection: A comprehensive survey

The information age enables people to obtain news online through various channels, yet in the meanwhile making false news spread at unprecedented speed. Fake news exerts detrimental effects for it impairs social stability and public trust, which calls for increasing demand for fake news detection (FND). As deep learning (DL) achieves tremendous success in various domains, it has also been leveraged in FND tasks and surpasses traditional machine learning based methods, yielding state-of-the-art performance. In this survey, we present a complete review and analysis of existing DL based FND methods that focus on various features such as news content, social context, and external knowledge. We review the methods under the lines of supervised, weakly supervised, and unsupervised methods. For each line, we systematically survey the representative methods utilizing different features. Then, we introduce several commonly used FND datasets and give a quantitative analysis of the performance of the DL based FND methods over these

datasets. Finally, we analyze the remaining limitations of current approaches and highlight some promising future directions.

III. PROPOSED METHODOLOGY

The proposed algorithm for fake news detection in this project utilizes Natural Language Processing (NLP) techniques combined with a Long Short-Term Memory (LSTM) network. LSTM, a type of recurrent neural network, is well-suited for processing sequential data such as text, where context and relationships between words can span long distances. In this approach, the LSTM model learns the temporal dependencies within the text, enabling it to capture complex patterns and contextual nuances that are crucial for distinguishing between real and fake news. To preprocess the text data, NLP techniques are used to convert raw text into a structured format suitable for model training. This involves tokenization, stopword removal, and transforming words into vector representations using word embeddings, such as Word2Vec or GloVe. These embeddings encode semantic information about words, allowing the LSTM to understand relationships between words in different contexts. The LSTM network processes the text sequentially, learning both short-term and long-term dependencies within the content, which is essential for

understanding the overall meaning of the article. By combining NLP for feature extraction with LSTM for sequence modeling, the proposed algorithm improves the ability to detect fake news. The LSTM's capacity to capture context from both past and future words enables the model to recognize subtle linguistic patterns that may indicate misinformation. As a result, this approach offers a more effective and accurate method for classifying news articles, even in the face of ambiguous or evolving language used in fake news.

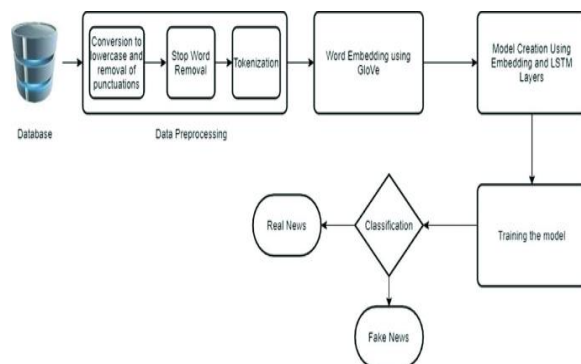


Fig. 1: System Overview

1. Data collection:

The first step in the fake news detection pipeline is to gather a suitable dataset of news articles. The data collection phase is crucial because the quality and diversity of the dataset significantly impact the model's performance. For this project, data can be sourced from publicly available datasets or gathered from various online news outlets.

2. Data Loading:

The second step in the fake news detection pipeline is to load and preprocess the dataset. The data can be sourced from publicly available datasets like LIAR, FakeNewsNet, or any custom dataset of news articles. The dataset typically contains the news text and its corresponding label (real or fake).

3. Text preprocessing:

Stopword Removal common words (e.g., "the", "is", "at") that don't add significant meaning to the context are removed. Lemmatization each word is reduced to its base form (e.g., "running" becomes "run") using NLTK or Spacy. Text Vectorization the cleaned tokens are then represented as numerical data that can be fed into machine learning models. For this project, we use Word2Vec, a pre-trained word embedding model, which transforms each word into a vector of real numbers capturing semantic relationships between words.

4. Word2Vec Embedding:

Once the text data is preprocessed, the next crucial step is converting words into Word2Vec embeddings. Word2Vec, developed by Mikolov et al. (2013), is a shallow neural network model that learns distributed representations of words based on their surrounding context.

5. Model Building (LSTM):

After transforming the text data into numerical vectors, the next step is to design the LSTM-based model for fake news detection. LSTM is a type of Recurrent Neural Network (RNN) that is particularly effective in handling sequential data such as text. LSTM is capable of learning long-range dependencies and understanding context over sequences of words.

6. Model Training:

The next step is to train the model on the preprocessed and vectorized data. During training, the model learns to predict whether a given article is real or fake based on the patterns it identifies in the input text.

7. Model Evaluation and Optimization:

After training, the model's performance is evaluated on the test dataset to see how well it generalizes to unseen data. If the model does not perform well, several techniques can be employed to optimize it:

8. Saving the Model (H5 Format):

Once the model has been trained and evaluated, the final step is to save the model for later use in deployment. In Keras (a popular deep learning framework), models can be saved in the H5 format, which stores the architecture, weights, and training configuration.

IV. EXPERIMENTAL RESULTS AND ANALYSIS

Experimental results demonstrated that the model effectively identified semantically similar tweets and detected the spread of fake news with high classification accuracy. The deep NLP architecture successfully captured contextual and semantic relationships between tweets, improving detection performance compared to traditional text matching and machine learning approaches. The analysis showed that incorporating tweet similarity measures reduced false positives and enhanced the identification of coordinated misinformation campaigns across social media platforms.



Fig. 2: Home Page

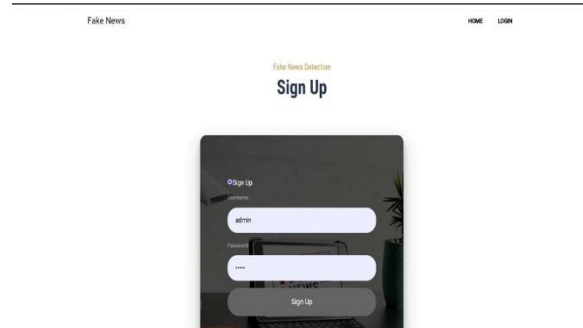


Fig. 3: Register

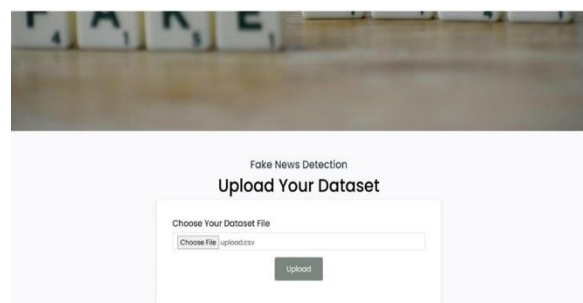


Fig. 4: Upload



Fig. 5: Predict Result



Fig. 6: Preview

V. CONCLUSION

In conclusion, this project demonstrates the potential of using NLP techniques combined with advanced models like LSTM for fake news detection, addressing a critical issue in today's digital age. By leveraging text-based features and contextual understanding, the system is able to identify patterns that distinguish real news from fake, providing a valuable tool for combating misinformation. The proposed system's ability to analyze news articles through both feature extraction and sequence modeling offers improved accuracy compared to traditional methods. However, the project also highlights areas for future improvement, such as integrating multimodal data, enhancing real-time detection capabilities, and incorporating explainable AI methods to improve model transparency. As fake news continues to evolve, further refinements and enhancements, such as multi-language support and continuous learning, will help the system adapt to new challenges, ensuring its relevance in the ongoing fight against misinformation. Ultimately, this work contributes to the broader field of fake news detection, offering a foundation for future research and development of more robust, scalable solutions.

REFERENCES

- [1] D. Pogue, “How to stamp out fake news,” *Sci. Amer.*, vol. 316, no. 2, p. 24, Jan. 2017.
- [2] H. Allcott and M. Gentzkow, “Social media and fake news in the 2016 election,” *J. Econ. Perspect.*, vol. 31, no. 2, pp. 211–236, May 2017.
- [3] R. Zafarani, X. Zhou, K. Shu, and H. Liu, “Fake news research: Theories, detection strategies, and open problems,” in *Proc. 25th ACM SIGKDD Int. Conf. Knowl. Discovery Data Mining*, New York, NY, USA, Jul. 2019, pp. 3207–3208.
- [4] Y. M. Rocha, G. A. de Moura, G. A. Desidério, C. H. de Oliveira, F. D. Lourenço, and L. D. de Figueiredo Nicolette, “The impact of fake news on social media and its influence on health during the COVID-19 pandemic: A systematic review,” *J. Public Health*, vol. 31, no. 7, pp. 1007–1016, Jul. 2023.
- [5] S. Vosoughi, D. Roy, and S. Aral, “The spread of true and false news online,” *Science*, vol. 359, no. 6380, pp. 1146–1151, Mar. 2018.
- [6] C. Silverman, *This Analysis Shows How Viral Fake Election News Stories Outperformed Real News on Facebook*. New York, NY, USA: BuzzFeed News, 2016.
- [7] Boyapati, P. K. Building a centralized data operations hub for healthcare enterprise integration. *IJSAT-Int. J. Sci. Technol.* 16 (2).
<https://doi.org/10.71097/IJSAT.v16.i2.3219>
- [8] Boyapati, P. K., Susarla, R. S., & Kandula, S. T. R. (2025, April). Revolutionizing Fraud Detection in Real-Time Financial Transactions Using AI-Based Boundary-Integrated Neural Networks with Starfish Optimization Algorithm. In *International Conference on Computer Vision and Robotics* (pp. 75-87). Cham: Springer Nature Switzerland.
- [9] Akinapalli, S. (2026). An Ai-Powered Data Trust And Quality Scoring Framework For Enterprise Decision Intelligence Systems. *International Journal of Data Science and IoT Management System*, 5(1), 946-950.

AUTHORS Profile



Mr. K. VIJAY KUMAR

Received my B.Tech(CSE) in 2017 from Sriindu college of Engineering and Technology (JNTUH). I completed my master of Technology (MTech), computer science in 2021 from Sreenidhi institute of science and Technology

(JNTUH) With 3 years of, dificated experience in academia and Research. I currently serves as a Assistant professor in CSE Department at Guru nanak institutions Technical campus ibrahimpatnam, Telangana, india.



Mr. R. ABHINAV pursuing B.Tech degree in Computer Science and Engineering at Guru Nanak Institutions Technical Campus affiliated to JNTUH in 2022-2026.



Ms. A. VHYSHNAVI REDDY pursuing B.Tech degree in Computer Science and Engineering at Guru Nanak Institutions

Technical Campus affiliated to JNTUH in 2022-2026.



Ms. YARRAM SHIRISHA pursuing B.Tech degree in Computer Science and Engineering at Guru Nanak

Institutions Technical Campus affiliated to JNTUH in 2022-2026.



Mr. CH. DEEPAK pursuing B.Tech degree in Computer Science and Engineering at Guru Nanak Institutions Technical

Campus affiliated to JNTUH in 2022-2026.