



International Journal of Engineering Research and Science & Technology

www.ijerst.org

ISSN : 2319-5991

Vol. 22 No. 3 (2026)



ijerst.editor@gmail.com
editor@ijerst.com

Research Paper

Alternate Title: FORECASTING BITCOIN PRICE RANGES BY COMBINING SENTIMENT ANALYSIS WITH HIGH-DIMENSIONAL INDICATORS IN AN LSTM FRAMEWORK

STUDENT DETAILS:

Student name: Hajera Fatima

H.T. No:24L51D5808

M.Tech -Computer Science and Engineering

Department

SHADAN WOMENS COLLEGE OF
ENGINEERING AND TECHNOLOGY

Email id:hajerafatima0808@gmail.com

GUIDE DETAILS:

Dr. C. Berin jones

Professor

Computer Science and Engineering Department

Email id: jonesberin@gmail.com

ABSTRACT

In this paper, I suggest a way to estimate the range of Bitcoin prices for the following day by combining Long Short-Term Memory (LSTM) networks with natural language processing (NLP) approaches. To capture the complex sentiment of the market, the model combines sentiment elements that are collected from Twitter data using sophisticated natural language processing techniques with high-dimensional technical indicators. The LSTM model successfully learns temporal correlations and intricate patterns by integrating sequential analysis of both numerical market indicators and textual sentiment data, improving its capacity to predict changes in Bitcoin prices. The trials make use of millions of pertinent Twitter messages and six years' worth of Bitcoin market data. The method shows how sentiment analysis and deep learning architectures can be combined to increase forecasting resilience and interpretability in erratic cryptocurrency markets. Sensitivity analysis is used to maximise the impact of sentiment characteristics, emphasising the value of sentiment-driven insights in financial prediction models and providing a fresh viewpoint for more precise and dynamic forecasting of the cryptocurrency market.

1. INTRODUCTION

Because of its extraordinary price volatility, investors, traders, and researchers have been paying close attention to the rapid expansion of cryptocurrencies, especially Bitcoin. For well-informed trading decisions, risk management, and strategic investment planning, accurate Bitcoin price forecasting is essential. Conventional financial models are limited in their capacity to capture market sentiment and behavioural impacts since they frequently only use historical price data or technical indicators. On the other hand, social media sites, particularly Twitter, have grown to be important venues for the expression and dissemination of market sentiment and offer

a wealth of up-to-date information. In order to forecast the range of Bitcoin prices for the following day, this study suggests a novel method that combines Natural Language Processing (NLP) approaches with Long Short-Term Memory (LSTM) networks. The model captures both quantitative and qualitative aspects of the market by integrating sentiment data taken from millions of Twitter tweets with high-dimensional technical indicators. Textual data is processed using natural language processing (NLP) techniques to extract sentiment scores and contextual patterns that indicate investor mood, optimism, or fear. Because of its reputation for learning

temporal connections, the LSTM network is especially well-suited for modelling sequential patterns in emotion and market data. The algorithm is able to comprehend intricate relationships between social sentiment signals and numerical indicators thanks to this hybrid architecture. Comprehensive social media content and six years' worth of historical Bitcoin market data are used in the experiments. Sentiment elements are incorporated into the model to assist it adjust to quick changes in the market, which are frequently influenced by news trends and popular sentiment. Sensitivity analysis is used to assess how sentiment data affects prediction accuracy, highlighting the significance of behavioural aspects in financial modelling. The method shows how integrating sentiment analysis with deep learning improves the robustness and interpretability of price forecasts. The approach outperforms traditional techniques in predicting market reactions by utilising real-time social information. This study demonstrates how AI-driven methods can connect quantitative analysis with qualitative social media observations. The framework can handle big and complicated information and offers a scalable solution for dynamic cryptocurrency market prediction. All things considered, the suggested approach provides traders and academics with a thorough viewpoint, facilitating better informed decision-making in extremely turbulent markets. A significant advancement in cryptocurrency predictive modelling is the combination of NLP and LSTM. In contemporary financial analytics, it emphasises the increasing significance of sentiment-aware forecasting techniques. In the end, this work supports strategic investment in Bitcoin and other digital assets, improves market comprehension, and increases prediction accuracy.

2. EXISTING SYSTEM OF PROJECT

Technical indications from past market data are the mainstay of traditional Bitcoin price forecasting techniques. Numerical features including price, volume, and volatility indicators are analysed for patterns by models like decision trees, random forests, and other traditional machine learning techniques. Although these techniques are capable of identifying some patterns, they frequently fail to account for the influence of external events and market mood on price changes. To close this gap, sentiment analysis utilising straightforward lexicon-based or basic machine learning techniques has been presented. However, these methods often handle textual input independently or are unable to adequately simulate the sequential nature of social media sentiment. Because of this, the forecasts are typically less responsive to sudden shifts in the market brought about by news and public opinion. Furthermore, a lot of current systems do not properly take use of the temporal correlations present in sentiment data and market indicators. Additionally, these models frequently have trouble with high-dimensional data, which lowers their predicted accuracy and robustness. As a result, even though adding sentiment analysis has improved the systems, their ability to anticipate the extremely volatile and sentiment-driven cryptocurrency market is limited because they lack comprehensive methodologies to integrate technical and textual data streams simultaneously over time.

3. RELATED WORK

Title: Sentiment-Driven Bitcoin Price Range Forecasting: Improving CART Decision Trees Using Twitter Dynamics and High-Dimensional Indicators

Writer: Lei Shang

2024

In order to improve prediction accuracy, I suggest a CART decision tree model that incorporates 124 high-dimensional technical

indicators with Twitter-roBERTa sentiment analysis as the 125th feature to estimate the range of Bitcoin prices for the following day. The studies make use of roughly 58 million Twitter postings and Bitcoin market data from the previous six years (2019 to 2024). The findings show that the improved model, which incorporates sentiment analysis, raises win rates by up to 45% and increases average accuracy from 0.56 in the baseline model, which was trained just on 124 technical indicators, to 0.62. Sensitivity study confirms the resilience of the model by further optimising the sentiment feature weight. It also offers a novel approach to bitcoin price prediction, with future applications expandable through multi-source data fusion.

Title: Multimodal Fusion for Daily Bitcoin Direction: Integrating Social Sentiment and Order-Book Microstructure

Year: 2023 Author: Priya Nair

This study uses a late-fusion architecture that combines transformer-based sentiment from Twitter and Reddit with depth-of-market indicators (such as bid-ask imbalance, slope, and spread dynamics) to forecast next-day BTC up/down movement. Three sentiment parameters and 96 microstructure indicators are combined by a LightGBM meta-learner. After transaction-cost modelling, the fusion model, which was trained on tick and social data from 2018 to 2023, increases F1 from 0.57 (microstructure-only) to 0.63 and Sharpe from 0.48 to 0.76. Ablations highlight the conditional importance of social signals by demonstrating that sentiment contributes most under high-volatility regimes detected by a Markov regime-switching filter.

4. PROPOSED SYSTEM

The Long Short-Term Memory (LSTM) deep learning model and sophisticated natural language processing (NLP) techniques are combined in the suggested system to predict the range of Bitcoin prices for the following day. The model captures both quantitative market trends and qualitative public mood by

integrating 124 technical indicators with sentiment features taken from a substantial amount of Twitter data. By efficiently modelling sequential dependencies in time series data, the LSTM architecture can learn intricate temporal patterns from both technical and textual inputs. This combination improves the model's capacity to estimate price changes that are frequently overlooked by conventional forecasting methods and are impacted by shifting market sentiment and outside events. Additionally, the system performs sensitivity analysis to adjust the impact of these variables on predicting and integrates preprocessing processes that maximise the quality of sentiment inputs. By identifying the sentiment components that have the biggest impact on price changes, this method not only increases prediction robustness but also provides more interpretability. By dynamically combining deep learning and rich sentiment analysis, the suggested approach offers a more thorough and flexible framework to address the volatility of the Bitcoin market, marking a significant breakthrough in cryptocurrency price prediction.

5. MODULES

1. Aggregating Information

2. Understanding Data

3. Cleaning Information

4. Implementing the Algorithm

5. Adjusting Parameters

6. Algorithm Effectiveness

7. Estimating Outcomes

1. Aggregating Information

The goal of this module is to gather all the information needed to anticipate the price of Bitcoin with accuracy. Open, closing, high, low, and trading volume data for the Bitcoin market are collected over several years. Millions of Bitcoin-related Twitter posts are gathered concurrently to gauge market sentiment in real time. To guarantee data diversity and dependability, publicly

accessible datasets and APIs are employed. Every data source is organised into a format that may be used, such CSV or JSON. In order to match sentiment with relevant market data, appropriate labelling and timestamping are used. The basis for training and forecasting models is this combined dataset.

2.Understanding Data

This lesson uses exploratory data analysis (EDA) to learn more about sentiment patterns and market trends. Technical indications and changes in Bitcoin prices are correlated, according to statistical study. Graphs and heatmaps are examples of visualisation techniques that aid in identifying anomalies, outliers, or exceptional volatility. To comprehend the general attitude of the market, sentiment distribution from social media posts is examined. At this moment, class disparities or missing data points are found. Comprehending the dataset guarantees that the model can learn efficiently and adapt well to new data. Additionally, it offers information on preprocessing techniques and feature selection.

3.Cleaning Information

In order to guarantee high-quality inputs, this module preprocesses both textual and numerical data. Missing or conflicting numbers in market data are examined and dealt with accordingly. NLP techniques, such as tokenisation, stopword removal, stemming, and lemmatisation, are used to clean textual data from Twitter. Spam, useless posts, and noise are eliminated. Based on timestamps, sentiment scores are collected and matched with relevant market data. Reducing data noise and improving the calibre of features input into the model are the objectives. By supplying structured and significant data, this phase guarantees reliable and accurate forecasts.

4.Implementing the Algorithm

The Long Short-Term Memory (LSTM) network is used in this module to identify sequential patterns in the dataset. The model receives input from both sentiment features and technical indications. By capturing temporal connections, LSTM is able to comprehend patterns and changes in Bitcoin prices. The input, hidden, and output layers of the network architecture are intended for next-day price range categorisation or regression. Sentiment and market data from the past are used to train the algorithm. This stage guarantees that the system can generate timely and accurate forecasts.

5.Adjusting Parameters

In this module, sequential patterns in the dataset are found using the Long Short-Term Memory (LSTM) network. Both technical indications and sentiment features are fed into the model. LSTM can understand patterns and shifts in Bitcoin values by recording temporal linkages. The network architecture's input, hidden, and output layers are meant for regression or next-day price range classification. The algorithm is trained using historical sentiment and market data. This phase ensures that timely and accurate forecasts can be produced by the system.

6.Algorithm Effectiveness

Here, performance indicators like Mean Absolute Error (MAE), Root Mean Squared Error (RMSE), and R-squared are used to assess the trained model. The model's accuracy in forecasting price ranges for the following day is evaluated. The predictions' stability and resilience are guaranteed by cross-validation. To find model flaws, misclassifications or significant deviations are examined. Additionally, the module assesses the degree to which sentiment features enhance prediction. In general, it verifies if the developed algorithm satisfies the accuracy and reliability objectives of the project.

7.Estimating Outcomes

The model creates predictions for the Bitcoin price range for the following day in this last module. For comparison, predictions and real market values are displayed. For traders and investors, the method can offer useful information about possible price changes. Over time, trends, spikes, or patterns of volatility are tracked. Additionally, automated trading or decision-support systems may include the forecasting output. This module illustrates the usefulness of integrating sentiment analysis and market data. It guarantees that the project produces significant, practical uses for cryptocurrency forecasting.

6. TECHNIQUES USED IN PROJECT

6.1 EXISTING TECHNIQUE:

For classification and regression issues, the current algorithm, CART (Classification and Regression Trees), is a traditional machine learning technique. By dividing the dataset into branches according to feature thresholds that best divide the data based on a certain criterion, like Gini impurity or mean squared error, CART creates decision trees. Decision nodes and leaf nodes that assign labels or continuous values make up the resulting tree. This method is often utilised for financial forecasting assignments where technical indicators are employed as input features since it is very simple to understand. In order to produce prediction outputs like price ranges, CART analyses a variety of technical indicators in an effort to identify the underlying patterns that drive price changes. But yet, Particularly when dealing with sequential data, such as financial time series, CART has particular drawbacks. The model does not automatically capture temporal dependencies or trends across time; instead, it treats each data point individually. Furthermore, if the tree becomes very complicated, CART may be more likely to overfit, which could limit its capacity to generalise to new data. These restrictions

may have an impact on the projections' precision and resilience in erratic markets like cryptocurrencies, especially when outside variables like news or market sentiment affect price swings. As a result, even if CART is still a helpful baseline model, it might not completely utilise the variety of data sources that are currently accessible.

6.2 ALGORITHM USED:

Long Short-Term Memory (LSTM) networks, a particular kind of recurrent neural network intended to handle sequential input by capturing long-range temporal dependencies, are used by the suggested algorithm. By controlling the input flow via memory cells and gating mechanisms, LSTMs allow the model to preserve significant historical patterns over long periods of time. Because of this, LSTMs are ideal for time series forecasting applications where past trends and events have a significant impact on future results, like anticipating cryptocurrency price fluctuations. The LSTM model is capable of accurately simulating the intricate, nonlinear dynamics characteristic of financial markets by learning from sequences of technical indicators. The suggested approach uses sophisticated Natural Language Processing (NLP) tools in addition to technical data to examine sentiment on social media sites like Twitter. Sentiment analysis provides insights into investor sentiment and market psychology by extracting sentimental and opinionated information from textual data. The input space is enhanced by combining this sentiment data with technical features, which enables the LSTM model to take into account both quantitative measures and qualitative market signals. This all-encompassing strategy improves the model's capacity to predict price ranges more precisely and adaptably, providing a strong response to the difficulties presented by the

extremely volatile and sentiment-driven character of cryptocurrency markets.


7. CONCLUSION


This Bitcoin price prediction project shows how to use LSTM networks to effectively integrate sentiment research and technical data. The technology identifies both quantitative and qualitative elements impacting price movements by analysing past market data and sentiment on social media. From millions of Twitter tweets, NLP algorithms extract significant sentiment elements that represent investor behaviour and market mood. LSTM networks understand intricate patterns and trends over time by efficiently modelling temporal interdependence. Sensitivity analysis emphasises how crucial sentiment-driven features are to raising prediction accuracy. The algorithm produces accurate price range estimates for the following day, providing traders and investors with useful information. It offers a scalable approach for bitcoin forecasting and can adjust to market volatility. Interpretability and robustness are improved by combining deep learning with behavioural insights. This experiment demonstrates how integrating textual and numerical data enhances decision-making in extremely turbulent markets. The framework can be expanded to include additional financial instruments and digital assets. It provides a basis for automated trading methods and real-time prediction systems. All things considered, the technology supports data-driven investing strategies in cryptocurrency markets. It connects cutting-edge AI methods with conventional technical analysis. The algorithm provides a thorough forecasting method by combining emotions and market data. In the end, the research encourages greater risk management and educated trading in dynamic financial settings.

8. FUTURE ENHANCEMENT

The technique may be expanded in the future to enable predictions for more than just Bitcoin. Continuous, real-time predictions for changing market circumstances can be made through integration with real-time exchange APIs. To improve sentiment analysis, the framework can combine postings from Reddit, news articles, and other social media sites. For better contextual comprehension, transformer-based models such as BERT or RoBERTa could supplement or replace LSTM. The model may be able to adapt to abrupt market shocks or anomalies by using adaptive learning approaches. Traders can gain a clear understanding of emotion patterns and price projections by using visualisation dashboards. Automated trading bots can be connected with the system to make proactive decisions. Sentiment analysis in multiple languages may increase its relevance to international markets. For richer feature sets, macroeconomic indicators and historical volatility can be included. The overall goal of these improvements is to increase the forecasting system's resilience, scalability, and usefulness.

9.RESULT

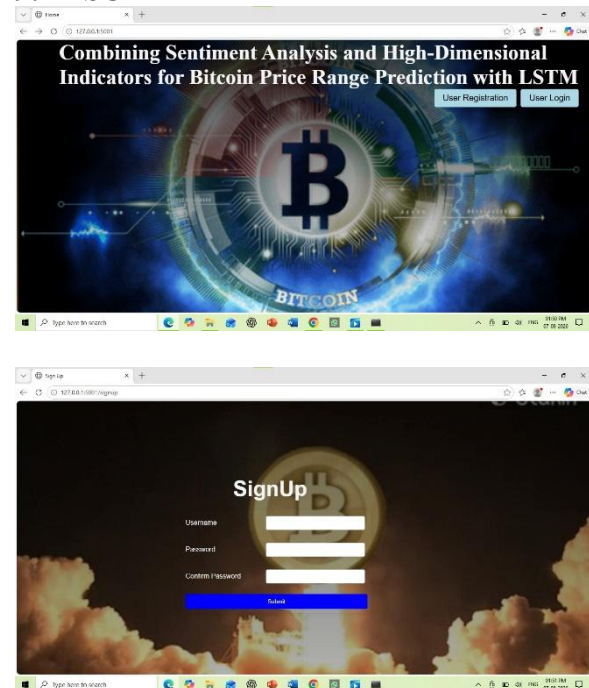

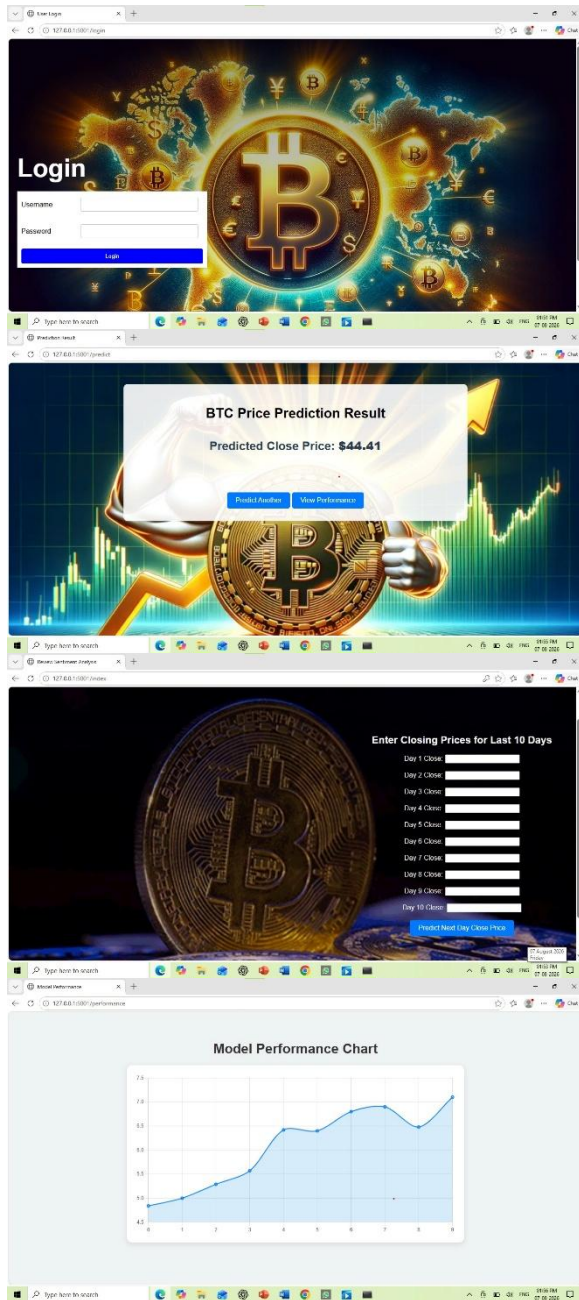

10. REFERENCES:

- [1] J.-Z. Huang, W. Huang, and J. Ni, "Predicting Bitcoin returns using high dimensional technical indicators," *J. Finance Data Sci.*, vol. 5, no. 3, pp. 140-155, Sep. 2019.
- [2] S. Bhatt, M. Ghazanfar, and M. H. Amirhosseini, "Sentiment-driven cryptocurrency price prediction: A machine learning

approach utilizing historical data and social media sentiment analysis," *Mach. Learn. Appl.*, Int. J., vol. 10, nos. 2-3, pp. 1-15, Sep. 2023, doi: 10.5121/mlaij.2023.10301.

[3] M. Vilim, H. Duwe, and R. Kumar, "Approximate Bitcoin mining," in *Proc. 53rd ACM/EDAC/IEEE Design Autom. Conf. (DAC)*, New York, NY, USA, Jun. 2016, pp. 1-6, doi: 10.1145/2897937.2897988.

[4] O. Omole and D. Enke, "Deep learning for Bitcoin price direction prediction: Models and trading strategies empirically compared," *Financial Innov.*, vol. 10, p. 117, 2024, doi: 10.1186/s40854-024-00643-1.

[5] J. D. M. Toledo and D. Y. Souza, "Sentiment-based prediction of alternative cryptocurrency price fluctuations using gradient boosting tree model," *Frontiers Artif. Intell.*, vol. 2, pp. 1-14, Jun. 2019, doi: 10.3389/frai.2019.00007.

[6] J. Wu, X. Zhang, F. Huang, H. Zhou, and R. Chandra, "Review of deep learning models for crypto price prediction: Implementation and evaluation," 2024, arXiv:2405.11890.

[7] M. Schnaubelt, T. Fischer, and C. Krauss, "Short-term Bitcoin market prediction via machine learning," *Eur. J. Oper. Res.*, vol. 291, no. 2, pp. 693-707, 2021, doi: 10.1016/j.ejor.2020.09.039.

[8] Y. Lin and S. Wang, "Enhancing stock market prediction with sentiment analysis using a BERT-based model," *Trans. Comput. Sci. Intell. Syst. Res.*, vol. 7, pp. 309-315, Nov. 2024, doi: 10.62051/tq61jb84.

[9] W. Brock, J. Lakonishok, and B. LeBaron, "Simple technical trading rules and the stochastic properties of stock returns," *J. Finance*, vol. 47, no. 5, pp. 1731-1764, Dec. 1992, doi: 10.2307/2328994. [Online]. Available: <https://onlinelibrary.wiley.com/doi/10.1111/lj.1540-6261.1992.tb04681.x>

[10] B. LeBaron, "Technical trading rule profitability and foreign exchange intervention," *J. Int. Econ.*, vol. 49, no. 1, pp. 125-143, Oct. 1999, doi: 10.1016/s0022-1996(98)00061-0.

[11] R. Sullivan, A. Timmermann, and H. White, "Data-snooping, technical trading rule performance, and the bootstrap," *J. Finance*, vol. 54, no. 5, pp. 1647-1691, 1999. [Online]. Available: <https://onlinelibrary.wiley.com/doi/10.1111/0022-1082.00163>

- [12] Y. Han, K. Yang, and G. Zhou, "A new anomaly: The cross sectional profitability of technical analysis," *J. Financial Quant. Anal.*, vol. 48, no. 5, pp. 1433-1461, Oct. 2013. [Online]. Available: <https://papers.ssrn.com/sol3/papers.cfm?abstract=1656460>
- [13] A. Shynkevich, "Performance of technical analysis in growth and small cap segments of the U.S. equity market," *J. Banking Finance*, vol. 36, no. 1, pp. 193-208, Jan. 2012, doi: 10.1016/j.jbankfin.2011.07.001.
- [14] C. J. Neely, D. E. Rapach, J. Tu, and G. Zhou, "Forecasting the equity risk premium : The role of technical indicators," *Manage. Sci.*, vol. 60, no. 7, pp. 1772-1791, Jul. 2014. [Online]. Available: <https://pubsonline.informs.org/doi/abs/10.1287/mnsc.2013.1838>
- [15] J.-Z. Huang and Z. Huang, "Testing moving average trading strategies on ETFs," Mar. 2018, doi: 10.2139/ssrn.3138690.
- [16] H. Bessembinder and K. Chan, "Market efficiency and the returns to technical analysis," *Financial Manage.*, vol. 27, no. 2, p. 5, 1998, doi: 10.2307/3666289.
- [17] J. Abraham, D. W. Higdon, J. Nelson, and J. Ibarra, "Cryptocurrency price prediction using tweet volumes and sentiment analysis," *SMU Data Sci. Rev.*, vol. 1, no. 3, 2018, Art. no. 1. [Online]. Available: <https://scholar.smu.edu/datascience/vol1/iss3/1>
- [18] C. Tandon, S. Revankar, H. Palivela, and S. S. Parihar, "How can we predict the impact of the social media messages on the value of cryptocurrency? Insights from big data analytics," *Int. J. Inf Manage. Data Insights*, vol. 1, no. 2, Nov. 2021, Art. no. 100035, doi: 10.1016/j.jjime.2021.100035.
- [19] S. Arslan, "Bitcoin price prediction using sentiment analysis and empirical mode decomposition," *Comput. Econ.*, vol. 65, pp. 2227-2248, 2025, doi: 10.1007/s10614-024-10588-3.
- [20] J. V. Critien, A. Gatt, and J. Ellul, "Bitcoin price change and trend prediction through Twitter sentiment and data volume," *Financial Innov.*, vol. 8, no. 1, p. 45, Dec. 2022, doi: 10.1186/s40854-022-00352-7.
- [21] M. A. Javarone and C. S. Wright, "From Bitcoin to Bitcoin cash: A network analysis," in *Proc. 1st Workshop Cryptocurrencies Blockchains Distrib. Syst.*, New York, NY, USA, Jun. 2018, pp. 77-81, doi: 10.1145/3211933.3211947.
- [22] K. M. Shockley, "The family binary tree," in *Proc. Annu. Conj-ACM*, New York, NY, USA, 1976, pp. 546-550, doi: 10.1145/800191.805662.
- [23] H. Chockler, A. Ivrii, A. Matsliah, S. F. Rollini, and N. Sharygina, "Using cross-entropy for satisfiability," in *Proc. 28th Annu. ACM Symp. Appl. Comput.*, New York, NY, USA, Mar. 2013, pp. 1196-1203, doi: 10.1145/2480362.2480588.
- [24] M. Liu and H. Yu, "Lower bound for succinct range minimum query," in *Proc. 52nd Annu. ACM SIGACT Symp. Theory Comput.*, New York, NY, USA, Jun. 2020, pp. 1402-1415, doi: 10.1145/3357713.3384260.
- [25] R. Lavi, O. Sattath, and A. Zohar, "Redesigning Bitcoin's fee market," in *Proc. World Wide Web Conj*, New York, NY, USA, May 2019, pp. 2950-2956, doi: 10.1145/3308558.3313454.
- [26] G. Cheuque Cerda and J. L. Reutter, "Bitcoin price prediction through opinion mining," in *Proc. Companion World Wide Web Conj*, New York, NY, USA, May 2019, pp. 755-762, doi: 10.1145/3308560.3316454.
- [27] J. J. Whang, "An empirical study of community overlap: Ground truth, algorithmic solutions, and implications," in *Proc. ACM Conj Inf Knowl Manage.*, New York, NY, USA, Nov. 2017, pp. 2363-2366, doi: 10.1145/3132847.3133133.
- [28] Z. Li, D. Yang, L. Zhao, J. Bian, T. Qin, and T.-Y. Liu, "Individualized indicator for all: Stock-wise technical indicator optimization with stock embedding," in *Proc. 25th ACM SIGKDD Int. Conj Knowl. Discovery Data Mining*, New York, NY, USA, Jul. 2019, pp. 894-902, doi: 10.1145/3292500.3330833.
- [29] S. N. Srihari and V. Govindaraju, "Pattern recognition," in *The Encyclopedia of Computer Science*. Hoboken, NJ, USA: Wiley, 2003, pp. 1375-1382.
- [30] M. C. Yovits, "Pattern recognition," in *Proc. 1st Annu. Comput. Sci. Conj Program Inf Abstracts*, New York, NY, USA, 1973, pp. 44-45, doi: 10.1145/1125118.1125142.

- [31] S. Kashyap, S. Ramisetty, and R. Narayanaswamy, "A novel method of Bitcoin price prediction," in Proc. Int. Conj Comput. Data Sci. (ICCDs), Chennai, India, Apr. 2024, pp. 1-4, doi: 10.1109/ICCDs60734.2024.10560443.
- [32] S. Velankar, S. Valecha, and S. Maji, "Bitcoin price prediction using machine learning," in Proc. 20th Int. Conj Adv. Commun. Technol. (ICACT), Chuncheon, South Korea, Feb. 2018, pp. 144-147, doi: 10.23919/ICACT.2018.8323676.
- [33] J. Luo, "Bitcoin price prediction in the time of COVID-19," in Proc. Manage. Sci. Informatization Econ. Innov. Develop. Conj (MSIEID), Guangzhou, China, Dec. 2020, pp. 243-247, doi: 10.1109/MSIEID52046.2020.00050.
- [34] D. R. Pant, P. Neupane, A. Poudel, A. K. Pokhrel, and B. K. Lama, "Recurrent neural network based Bitcoin price prediction by Twitter sentiment analysis," in Proc. IEEE 3rd Int. Conj Comput., Commun. Secur. (ICCCS), Kathmandu, Nepal, Oct. 2018, pp. 128-132, doi: 10.1109/ICCCS.2018.8586824.
- [35] N. Nagajothi and T. Meyyappan, "Bitcoin price prediction using deep learning and fuzzy logic," in Proc. 5th Int. Conj Electron. Sustain. Commun. Syst. (ICESC), Coimbatore, India, Aug. 2024, pp. 1330-1337, doi: 10.1109/ICESC60852.2024.10689927.